



**SK-14  
WALK-BEHIND SAW**

Blanchard Machinery Inc  
1890 N.E. 150 Street  
North Miami Fla.33181  
bmisalz@aol.com  
www.blanchardmachinery.net

Equipment Development Co., Inc. sales@edcoinc.com • 800.638.3326 • edcoinc.com


**WALK-BEHIND SAWS ARE DESIGNED TO PROVIDE STRAIGHT, SMOOTH CUTS AND WITHSTAND THE RIGORS OF EVERYDAY USE**

EDCO Walk Behind Saws are built from the ground up to provide years of reliable cutting. These saws will cut concrete and asphalt with little to no vibration because of their heavy-gauge steel frames, rugged shafts and bearing assemblies.

- Precision machined arbor shafts
- Superior rigidity for smooth, clean, straight cuts
- Large screw-type depth control locks for consistent cutting depth
- Multiple-belt power transfer system
- Heavy-Duty 7-gauge steel construction

**PRODUCT NOTES:** • Stable frame with wide wheel base, • Rear wheel shaft mounted end to end for strong rigidity • Heavy-duty, 7-gauge steel frame, under-carriage and steel core wheels eliminate bending & vibration • Precision machined 1" arbor

**IDEAL FOR:** Short-run slab cutting, contraction joints, patch repairs in asphalt, traffic loop installation, and trenching

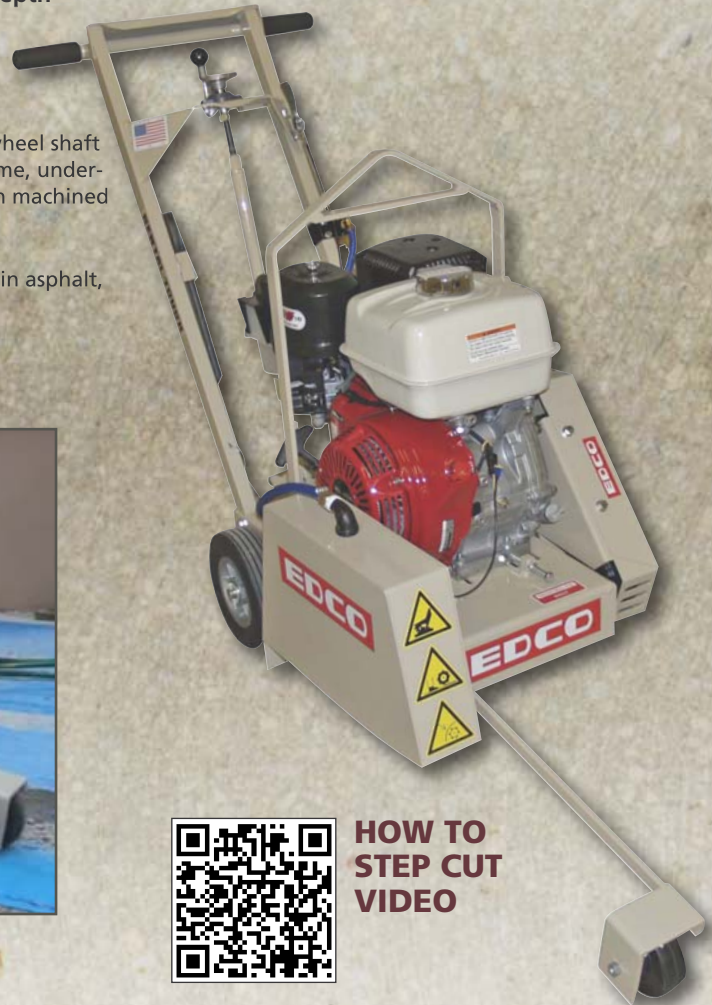

**HOW TO  
STEP CUT  
VIDEO**

**14" DOWNCUT - CONCRETE AND ASPHALT SAWS - MAX CUTTING DEPTH 4 3/4"**

MODEL #	PART #	POWER	HORSE POWER	PHASE	AMPS	*RPM's	BELTS	LENGTH	WIDTH	HEIGHT	WEIGHT
SK-14-9H	45400D	Gasoline	*9 HP	N/A	N/A	3600	Cgd "V" Belts	48"	23"	38"	190 lbs
SK-14-11H	45600D	Gasoline	*11 HP	N/A	N/A	3600	Cgd "V" Belts	48"	23"	38"	190 lbs
SK-14-13H	48100D	Gasoline	*13 HP	N/A	N/A	3600	Cgd "V" Belts	48"	23"	38"	190 lbs

\* RPM's are based on the machine's blade speed. \* NET HORSEPOWER STATEMENT - \*As rated by the engine manufacturer. The power rating of the engine indicated in this document is the net power output tested on a production engine for the engine model and measured in accordance with SAE j1349 at 3600 rpm. Mass production engines may vary from this value. Actual power output for the engine installed in the final machine will vary depending on numerous factors, including the opening speed of the engine in application, environmental conditions, maintenance, and other variables.