



SS-20 SELF-PROPELLED SAW

Blanchard Machinery Inc
1890 N.E. 150 Street
North Miami Fla. 33181
bmisalz@aol.com
www.blanchardmachinery.net

Equipment Development Co., Inc. sales@edcoinc.com • 800.638.3326 • edcoinc.com


SELF-PROPELLED SAWS ARE DESIGNED TO INCREASE YOUR CONCRETE AND ASPHALT SAW CUTTING PRODUCTION!

EDCO Self-Propelled Saws are built like tanks, designed for high production and low maintenance cutting. Cut miles of roadway with little to no vibration because of their heavy-gauge steel frames, heavy-duty shafts and bearing assemblies.

- Heavy-Duty 7-Gauge Steel Construction Provides Superior Torsional Rigidity for Smooth, Clean, Straight Cuts
- Heavy-Duty Undercarriage and Large Wheels Assure Straight Cuts and Less Vibration
- Precision Machined Arbor Shafts with Multiple-Belt Power Transfer System
- Blade Saver Safety Switch Turns Off Power When Water Supply is Cutoff

IDEAL FOR: Highway, road and bridge repair • Utility installation
• Traffic loop installation

PRODUCT NOTES: Stressproof, precision-machined, 1 1/32" steel arbor shaft
• Includes electric start, 12-volt battery and heavy-duty 15-amp charging system,
• Swing-away, 3-gallon fuel tank • Screw-type depth control w/ lock guarantees accurate cutting

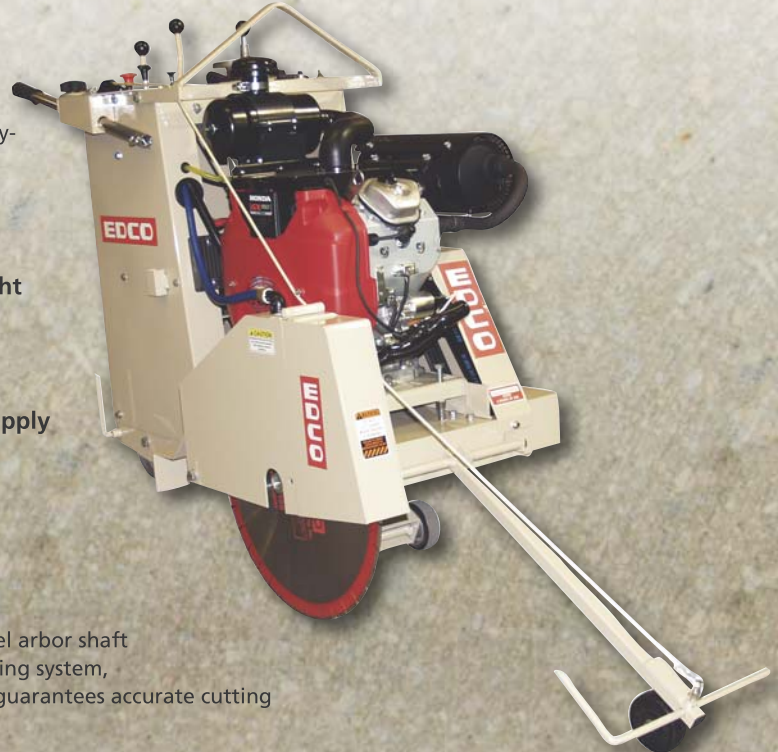

20" SELF-PROPELLED - CONCRETE AND ASPHALT SAWS - MAX CUTTING DEPTH 7 3/4"

MODEL #	PART #	POWER	HORSE POWER	PHASE	AMPS	*RPM's	BELTS	LENGTH	WIDTH	HEIGHT	WEIGHT
SS-20	32600	Gasoline	*24 HP	N/A	N/A	2760	Cgd "V" Belts	46"	25"	39"	458 lbs
SS-20	32800	Gasoline	*13 HP (16" Max. Blade)	N/A	N/A	3600	Cgd "V" Belts	46"	25"	39"	438 lbs
SS-20-7.5	33200	Electric	7.5 HP, 230/460 V	Three	17.4/8.7	2835	Cgd "V" Belts	46"	25"	39"	465 lbs
SS-20-10	33100	Electric	10 HP, 230/460 V	Three	23/11.5	2835	Cgd "V" Belts	46"	25"	39"	478 lbs
SS-20-23.5P	34600	Propane	23.5 HP, Propane Kohler	N/A	N/A	2760	Cgd "V" Belts	46"	25"	39"	498 lbs

EDCO SAWS CAN BE MODIFIED FOR SPECIAL CUTTING TASKS, INCLUDING PARALLEL CUTS, AND MULTIPLE DIAMOND BLADE SETUPS



* RPM's are based on the saw blades speed. * NET HORSEPOWER STATEMENT - *As rated by the engine manufacturer. The power rating of the engine indicated in this document is the net power output tested on a production engine for the engine model and measured in accordance with SAE J1349 at 3600 rpm. Mass production engines may vary from this value. Actual power output for the engine installed in the final machine will vary depending on numerous factors, including the opening speed of the engine in application, environmental conditions, maintenance, and other variables.